




Dovetail RUGGED TOUCH DISPLAY

www.dandrelectronics.com

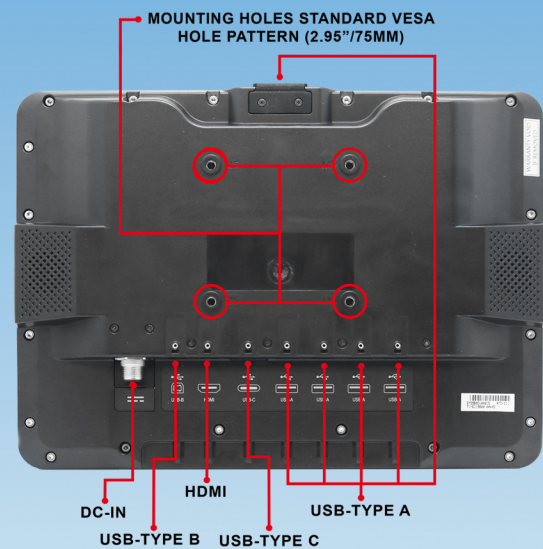

KEY FEATURES:

ENABLE DEX IN TWO WAYS. THROUGH A USB TYPE C CONNECTION AND/OR THROUGH AN HDMI CONNECTION FROM THE MONITOR TO THE DOVETAIL BREAKOUT BOX

LARGE 12.25"/311.15 MM HD 1080P, 1200 NIT TOUCH DISPLAY

PHYSICAL KEYS TO EASILY ADJUST BRIGHTNESS/ VOLUME

AMBIENT SENSOR TO ADJUST BRIGHTNESS AUTOMATICALLY

OPTIMIZED AUDIO EXPERIENCE WITH TWO 3.0W INTEGRATED SPEAKER

MIL SPEC RATING: MIL-810G, WITH OPERATING TEMPERATURE -20°C =/-4°F TO +60°C/140°F

Dovetail TECHNICAL SPECS.

		RuggON MP Version
Display	Size	11.6"
	Resolution	1920 (H) *RGB* 1080 (V)
	Brightness	1000nits
	Contrast Ratio	900 :1 Typ.
	Response time	25 ms (50ms max)
	Color Depth	
	View Angle	85/85/85/85 (80/80/80/80 min)
	Operation Temperature	-20~70
Touch	Type	P-CAP
	#of Points	Multi-Point
	CG	True-Flat
	Optional Coating	AF/AR
Power Input	Voltage	12V
	Connector	DC Jack w/ screw
Video input	HDMI 1.4	X1
	USB Type C	x1
External I/O	USB Type A	USB 2.0 x1 (upward with cover) USB 2.0 x4 (downward)
	USB Type B	x1
Button	Physical	Total x7
		Auto dimming on/off x1 Brightness x2 Black out x1 Volumex1
Others	Speaker	3W x2
	Ambient Light Sensor	Yes
	Mounting	VESA 75 (* M5 screw hole)
	Accessories (Optional)	Cable lock bracket
System Environmental Spec	Shock/ Vibration	MIL-810G
Outlook	Operation Temperature	-20 ~60
	Dimension	332x 268x 43 (mm)
	Material	Plastic

For more information on this and other products, please contact:

D&R Electronics Co. Ltd.

Toll Free: 1-800-538-7338

www.dandrelectronics.com