



Product Guide



1-800-538-7338 | www.dandrelectronics.com

TABLE OF CONTENTS

CONSOLE ACCESSORIES.....	p.23
CONSOLES.....	p.20
CUSTOM BUILDS.....	p.34
DOCKING STATIONS.....	p.26
STORAGE SOLUTIONS AND WEAPON MOUNTS.....	p.29
K9 KENNELS.....	p.30
LAPTOP TRAYS / LAPTOP MOUNTS.....	p.25
LED BEACONS / VISOR LIGHTS / WINDSHIELD LIGHT.....	p.7
LED LIGHTBARS.....	p.3
LED LIGHTS / GENESIS LICENSE PLATE BRACKETS.....	p.9
LIGHT / SIREN CONTROLLERS.....	p.13
MINITECH LIGHTBARS.....	p.4
MOUNTING PLATE & LEG KITS.....	p.22
ODYSSEY LIGHTBARS.....	p.5
PARTITIONS / WINDOW BAR SYSTEMS.....	p.33
POWER DISTRIBUTION UNITS.....	p.18
PRINTER HOLDERS / G1 DOCK.....	p.27
REAR WINDOW GUARDS / DOOR SKINS.....	p.32
SAMSUNG DeX - DOVETAIL.....	p.19
SIRENS.....	p.13
SPEAKERS / BATTERY WATCHDOG / ANTI-THEFT MODULES.....	p.16
SUBFRAMES.....	p.28
TAILGATE EXTERIOR LIGHTBARS / LED TRAFFIC DIRECTORS.....	p.8



LIGHTBARS

SYNERGY LIGHTBAR



- Available with 6, 12, or 18 High Power LED plug-in modules
- Deep parabolic reflector optix
- Built-in Traffic Director
- Standard Dimmer and Pattern feature
- Built-in and programmable flash patterns
- Options available for configuring with IQ Software
- Flash pattern programs uploadable via USB
- Amperage draw:
6 LED module - 0.65A / 12 LED module - 1.15A /
18 LED module - 1.75A
- Operating Temperature: -40°C to +65°C (-40F to +149F)
- 15 conductor 16 feet harness or DATA Cable when controlled with D&R controller
- UV treated polycarbonate lens

- Screw down lens to base
- Available colors: Amber, Blue, Clear, Red, Green
- Single/Dual/Tricolor modules available:
CLEAR, RED, AMBER, BLUE, GREEN
- Full Front Clear Take Downs available
- Meets all applicable SAE Class1, NFPA and Title XIII when properly configured
- Available sizes:
Width - 13", Height - 2", Length - 24" / 36" / 48" / 60" / 72"
- Gutter clamps to install Synergy Lighbar on Interceptor Utility:
936-0757C - Stainless Steel
936-0757A - Black
936-0757B - White

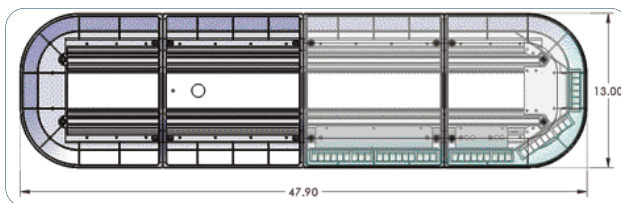

936-0757B

PROWLER LINEAR LIGHTBAR



- Provides 360 degrees of coverage
- Selectable flash patterns
- Either 6 (WDRF6) or 12 (WDRF12) High Power LED plug-in modules
- 13 conductor 18' harness (other lengths available)
- Amperage Draw: 0.55 - 0.6 amp per module
- Total Amperage Draw: 12.5 amp
- Operating Temperature: -40°C to +65°C (-40°F to 149°F)
- Rear **RED** LED S/T/T Lights available
- Available with Front, Rear, and Side **CLEAR** LED Work Lights
- Exceptionally bright and powerful signal generated by D&R light modules




- Optional internal or external photocell available for auto dimming night
- UV treated polycarbonate lens
- Deep parabolic reflector
- Dual colour modules independantly controlled
- +12VDC - Negative Ground
- Meets all applicable SAE Class 1 and California Title XIII and NFPA1901 when properly configured
- Multiple mounting options available
- Material: Base - Corrosion resistant aluminum chasis
- Available sizes: L - 22" / 35" / 46" / 56" / 66" / 76",
W - 13", H - 2.75" (w/o mount feet)



MT-4ST6-X / MT-6ST6-X

- Mini LED Lightbar **MT-4ST6-X / MT-6ST6-X**
- Dimensions: L-17", W-8.0", H-2.25" w/o mounting feet
- Weight: 5lbs w/o mounting feet
- HD Extruded Aluminum Base
- Clear Polycarbonate Lens with UV Guard
- GEN III Linear LED Light Modules with 6 or 12 Leds
- 12/24V
- Class 1, SAE J845 Certified



- Operating Temperature: -50°C to +50°C
- LinearLED light Modules with 6 or 12 Leds
- Maximum Draw: GT6 Modules - 3.6 Amp
GT12 Modules - 7.2 Amp
- Available LED Modules colors:
BLUE, CLEAR, RED, RED/CLEAR, BLUE/CLEAR
- Available Lenses colors: **BLUE, CLEAR, RED**

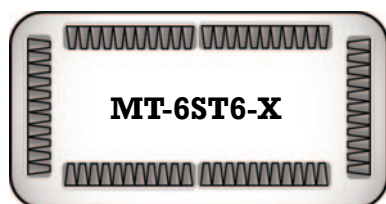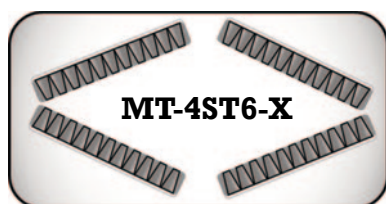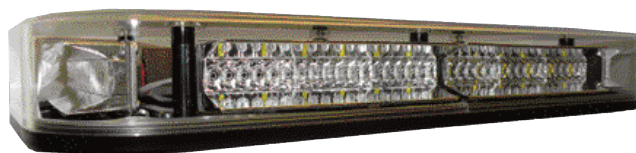

Mounting Options Available:

1. 400-0200 Bumper Rubber Lightbar feet
2. 90.3281 Cigarette adapter plug ON/OFF Momentary 12ft cord
3. Magnetic Mount kit with four round 90 lbs pull magnets*
4. Magnetic Mount, medium height mount kit, two 1.75" tall brackets (936-0543A) and four round 90 lbs pull magnets*
5. Magnetic Mount, medium height mount kit, two 4" tall brackets (936-0544A) and four round 90 lbs pull magnets*

*Note: Magnetic mounting will not work on vehicles with aluminum bodies

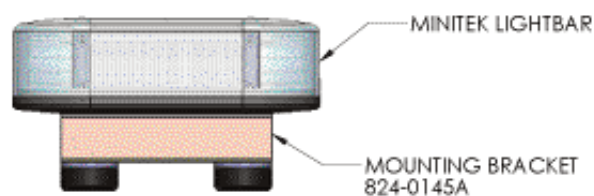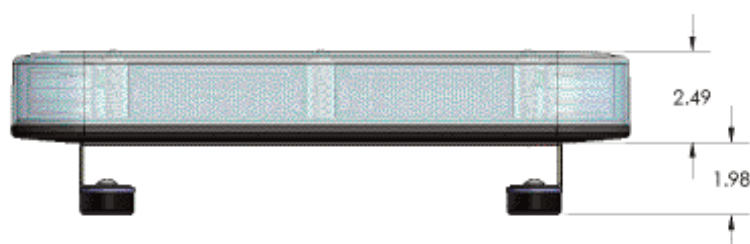

ODYSSEY LIGHTBARS & FLIP-UP ARROW BOARDS

OD-ELITE - ODYSSEY ELITE LIGHTBAR




- Operates with 12 or 24 volts
- Power Consumption
Display Average 8Amps, Light bar Average 7Amps
0 Amps consumption on shutdown
- Web based graphical user interface for setup programming.
- Access Web interface through computer or mobile device
- Easy Installation three wire hook up.
- SD card upload for messages or light bar flash pattern programs
- Touchpad with 2.4 inch LCD Full Color Graphic display and full color backlight keys.



Messageboard

- 24 bit 16M color LEDs.
- Multi - Lingual Display
- What you see is what you get setup
- Full Color RGB Message board capable of text and graphics.



ODYSSEY LIGHTBAR / FLIP-UP ARROW BOARD

- The Odyssey LED sign is a compact lightbar and arrowboard combination
- The retractable motorized arrowboard / traffic director provides superior visibility in a low profile configuration
- This patent design gives you the full advantage of a 360-degree lightbar when in lower position

FEATURES:

- GEN III LED technology
- Low-profile (3" high) and 'Easy Swap' plug and play modules
- Motorized actuator for easy deployment
- Compatible with D&R Light Controllers / Light & Siren Ctrl
- Mounting kit included
- Meets SAE Class1 and Title XIII when properly configured

MINI ODYSSEY LIGHTBAR



1. ODM3-1A Board with One Arrow (12 LED modules in Board)
2. ODM3-2A Board with Two Arrows (16 LED modules in Board)
3. ODM3-1ARA Board with One Arrow and Road Alert (12 LED modules in Board)

Mini Odyssey Dimensions:

Sign Down: W-47 3/4", D-21 1/4", H-3.0"
Sign Up Raised Height: 19 7/8"

ODYSSEY LIGHTBAR



1. OD3-1A Board with One Arrow (16 LED modules in Board)
2. OD3-2A Board with Two Arrows (24 LED modules in Board)
3. OD3-1ARA Board with One Arrow and Road Alert (16 LED modules in Board)

Odyssey Dimensions:

Sign Down: W-47 3/4", D-28 1/4", H-3.0"
Sign Up Raised Height: 26 7/8"

MINI ODYSSEY LIGHTBAR W/BUILD-IN ROAD ALERT SIGN

ODM3-RA



TECHNICAL SPECS:

- Finish: Enamel
- Color: White or Black
- Material: Base-12ga aluminum / Sign-8ga aluminum
- Optional Road Alert designed in
- Dimensions: Sign Down: W-47 3/4", D-21 1/4" / H-3.0"
Sign Up Raised height - 19 7/8"

- Arrow Board: Road Alert RAT-X-40

*X-available colors: **AMBER, RED**


- CPL (Character/Line) - 8
- Programmable messages - 80
- Text Messaging - Yes
- Symbols - Yes
- Fixed / Scrolling Message - Yes

LED BEACONS

- Polycarbonate base and lenses with UV protection.
- Amperage draw: Average—1.8 Amp, Peak—3.6 Amp
- Operating Voltage: 9.5V-24V
- Dimmer Function through wire connection
- Comes with 3ft straight cable for permanent mount
- Optional Lighter Plug with dual switch (ON/OFF and Momentary) and with 15ft straight cable —Part# 215-0183
- Mounting Options; magnet, mirror mount, truck rack,
- 25 Flash Patterns with 2 Simulated Rotating Patterns
- Available Lens Colours: **AMBER, BLUE, CLEAR, RED**
- Available Led Colours : **AMBER, BLUE, CLEAR, GREEN, RED**
- Weight is less then 3lbs
- SAE J845 Class 1 Certified in Amber
- For Magnet mount order magnet mounting kit#: 499-0003 Magnetic Mount Version Includes :
 - 1) One 3" round 90 lb pull magnet
 - 2) One 15 Ft cable with dual switch power plug



BCN24

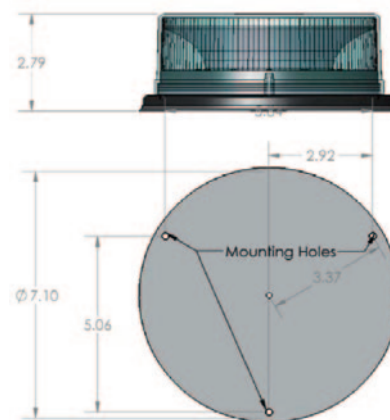

GENESIS SLEEK VISOR LIGHTS

- Hi visibility when activated.
- Low profile, lightweight
- Extremely discrete and non-intrusive
- Split Red/Blue super bright LED
- Single/Dual colour modules
- Take down option available
- Selectable flash pattern
- Aluminum trim mounting brack to hold the lightbar position near the top windshield area
- Molded rubber trim around edge giving tight fit with no Flashback
- Available for a variety of makes and models


GSVL-PIC-F150



GSVL-IC-CHRGR



GSVL-PIC-EXP20

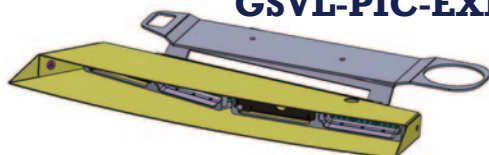

GSVL-PIC-TAHOE



GSVL-PIC-TAH21



WINDSHIELD LIGHT

- Designed to fit as a center mount above the rear view mirror
- Polycarbonate assembly is safer than metal in the event of an accident
- High visibility when activated
- low profile, lightweight
- Extremely discrete and non-intrusive
- Dual or split module LEDs
- Lightweight and sturdy
- Rated for 100,000 hours of operation
- Multiple Flash Patterns
- Available colours: **AMBER, BLUE, CLEAR, RED**
- Dimensions:
H: 1.3", W: 3.8", D: 1.6"




MR6-RB-WL



TAILGATE EXTERIOR LIGHTBAR

- Rear spoiler molded LED light stick
- Genesis LED technology design
- Multiple flash patterns built-in
- Arrow functions
- 12 LED's per module
- Single/Dual colour modules
- Available for a variety of makes and models

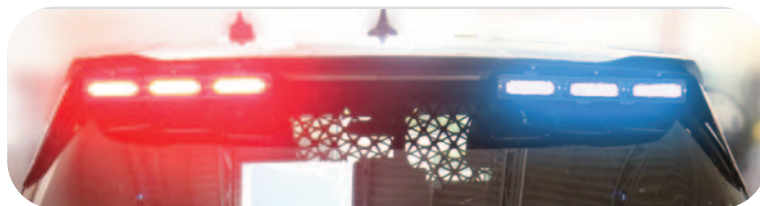

GT2FTL-PIC-EXP20



GT2FTL-IC-TAH15



GT2FTLV2-PIC-EXP20



GT2FTL-PIC-TAH21



LED TRAFFIC DIRECTOR

GEN. II LED TRAFFIC DIRECTOR



- LED Traffic Director is a Highly visible, caution/directional indicator to oncoming Traffic
- SAE Compliant Class1 J595, J845
- 8 sealed Genesis modules, each module uses 1Watt LED Technology (available on request with different number of modules)
- Internal / External mounting
- Available in **AMBER**, **BLUE**, **RED**, and **CLEAR**
- Available in a kit configuration with AS5500 Touchpad, Electronics Module, cables and Mounting Brackets
- Needs external control system
- Traffic Directors are also available with optional

- Photo Dimmer Sensor (the sensor functionality depends on the chosen control system)
- Various lengths and colour combinations available


Technical Specifications:

- Input Voltage Range: 11-16 VDC
- Current Draw: 3 Amps max
- Operating Temperature: -30°C to +65°C (-22F to +149F)
- Dimensions: W-48", H-2.0", D-2.2"
- Mounting: Surface mount (brackets included)
- Warranty: Five years

Kit/Part Number	Description	Colour(s)	Length
GT2F12-6TD03-PIC	6 Module Stick	3 BLUE / AMBER , 3 RED / AMBER	36"
GT2F12-8RTD-PIC	8 Module Stick	RED	48"
GT2F12-8ATD-PIC	8 Module Stick	AMBER	48"
GT2F12-8ATD03-PIC	8 Module Stick	4 BLUE / AMBER , 4 RED / AMBER	48"

GENESIS

- **GENESIS** modules are our newly designed LED lights
- Surface (GS12-S-X-F), Flush (GS12-F-X-F), Deck (GS12-D-X-F) mount LED flashing modules
- These compact modules provide great versatility for a wide range of mounting
- All modules are sealed, waterproof for external mounting applications
- Ideally suited for use as directional or perimeter lighting
- Multiple flash patterns built-in
- Input Voltage: 11-16 VDC Nominal
- Synchronous or alternate operation
- Dimensions:
GS12-D-X-F: L-4.0", H-1.0", D-1.25"
GS12-S-X-F: L-4.5" (Bottom), L-4.0" (Top), H-1.0", D-1.25"
GS12-F-X-F Exposed Dimensions: L-4.5", H-0.5", D-1.25"
- Available in single and split colors:
CLEAR, RED, AMBER, BLUE, GREEN
- Meets SAE Class 1 Standards
- IP67 Rating



DECK MOUNT GS12-D-X-F




FLUSH MOUNT GS12-F-X-F




SURFACE MOUNT GS12-S-X-F

GENESIS LIGHT SHROUDS




Rear Plastic Genesis Dual Light Shroud (923-0115A)




Single Rear Plastic Genesis Shroud (923-0116A)


GENESIS LIGHT MOUNTING BRACKET




936-0521A



936-0522A



936-0523A




936-0524A



936-0525A

MS6 SYNC LIGHTS

1. MS6-S-X-F Surface Mount 6 LED's Module
Dimensions: W-3.25", H-1.25", D-1.1"
2. MS6-F-X-F Flush Mount 6 LED's Module
Dimensions: W-3.25, H-1.5", D-1.0"



1



2



- MS6 LED modules utilize the latest in 1W LED technology
- Ideally suited for use in directional warning solutions
- These compact modules provide great versatility for a wide range of mounting options
- All modules are sealed, waterproof for external mounting applications
- Multiple flash patterns built-in
- Available models:
MS6-S-X SINGLE COLOR
MS6-S-XX-F DUAL COLOR
X-LED Color: A-**AMBER**, B-**BLUE**, C-**CLEAR**
- Current Draw: 0.4A Solid ON
0.160A Average Pattern ON
- Input Voltage: 12-24 VDC Nominal
- Synchronous or alternate operation
- IP67 Rated
- Meets SAE Class 1



1



2



3



4



5

1. 936-0397A L Bracket, 2" tall, single
2. 936-0398A L Bracket, 2" tall, double
3. 936-0402A L Bracket, 4" tall, triple
4. 936-0400A L Bracket, 4" tall, single
5. 936-0401A L Bracket, 4" tall, double


GENESIS LICENCE PLATE BRACKETS

936-0533A


License Plate Bracket for Genesis Surface Mount LED Modules (x4), two options for mounting the modules (horizontal or vertical)

936-0533B

License Plate Bracket for Genesis Surface Mount LED Modules (x2), two options for mounting the modules (horizontal or vertical)



936-0533B



936-0533A

- GS12 modules not included
- Rubber U-Channel along the edges
- Dimensions (936-0533A & 936-0533B)
Width: 22.15"
Height: 6.16"

GR6 LED GRILL LIGHT MODULES

Simply remove the factory grill caps and replace them with D&R's new GR6 light modules. No mounting hardware re-quired, this new product allows for the addition of front end lighting without compromise!

SPECIFICATIONS:

- 21 Flash Patterns
- Operation Voltage: DC 12-24V
- Operating Temperature Range : -40° C to +60° C
- Regulation SAE J595 Class 1
- Rating : IP67
- Mount base set P936-0002A
- PY Lights must be listed separately on order



COMPACT INTERIOR/EXTERIOR LED LIGHT HEADS

PY-9600 SEALED SURFACE MOUNT

- Mounting: Two Hole Through Base
- Size: 3-25/32"L x 1-19/32"W x 1-7/64"H
- Voltage: 12 – 24VDC
- LEDs: 3
- Rating: IP67
- Compliance: SAE Class I
- Flash Patterns: 23
- Aluminum Base / Clear Polycarbonate Lens



PY-9630 SEALED SURFACE MOUNT

- Mounting: Two Hole Through Base
- Size: 2.90"L x 0.95"W x 0.60"H
- Voltage: 12 – 24VDC
- LEDs: 3
- Rating: IP67
- Compliance: SAE Class I
- Flash Patterns: 16
- Aluminum Base / Clear Polycarbonate Lens



PY-9672 THIN SEALED SURFACE MOUNT

- Mounting: Two Hole Through Base
- Size: 4.64"L x 1.14"W x 0.44"H
- Voltage: 12 – 24VDC
- LEDs: Single 9 / Dual 12
- Rating: IP67
- Compliance: SAE Class I
- Flash Patterns: Single Colour 14 / Dual Colour 40
- Aluminum Base / Clear Polycarbonate Lens



PY-9674 ULTRA-THIN SEALED SURFACE MOUNT

- Mounting: Two Hole / HD Adhesive
- Size: 3.58"L x 1.10"W x 0.29"H
- Voltage: 12 – 24VDC
- LEDs: 6
- Rating: IP67
- Compliance: SAE Class I
- Flash Patterns: 22
- Aluminum Base / Clear Polycarbonate Lens




Model	Name/Description	Colour (X*)
PY-9600-X*	Sealed Surface Mount, Single Colour	BLUE (B)
PY-9630-X*		AMBER (A)
PY-9672-X*	Thin Sealed Surface Mount, Single Colour	BLUE (B)
		CLEAR (C)
		AMBER / CLEAR (A/C)
PY-9672-X*/X*	Thin Sealed Surface Mount, Dual Colour	BLUE / CLEAR (B/C)
		AMBER (A)
PY-9674-X*	Ultra-Thin Sealed Surface Mount, Single Colour	BLUE (B)
		CLEAR (C)
		AMBER (A)

LBSF-X LITEBRITE LED SURFACE MOUNT

- LITEBRITE LED lights modules utilize the latest in GEN II LED technology
- Ideally suited for use as a directional warning solution.
- Featuring a much narrower housing
- Provide even greater versatility for a wide range of mounting options.
- The surface mount format facilitates mounting solutions where the unit cannot be embedded in the mounting surface.
- All modules have a built-in flasher and are sealed for external mounting applications.
- Dimensions (with Rubber Gasket):
Length-5.411", Width-2.653", Depth-0.825"
- Dimensions (without Rubber Gasket):
Length-5.067", Width-2.295", Depth-0.757"
- Voltage Rating: 12V
- Available w/black (LBSF-X*) polycarbonet base and clear lense with UV protection

*X - Available Colours: **AMBER**, **CLEAR**, **BLUE**, **RED**

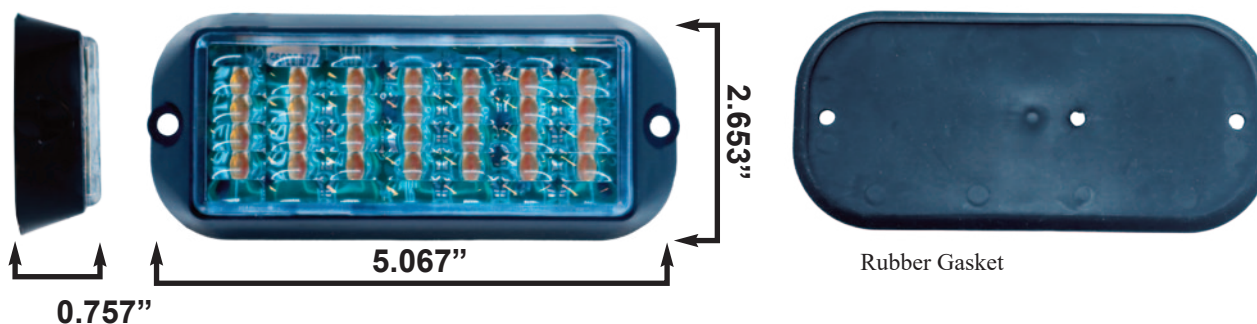

MOUNTING BRACKETS



LED INSERT LIGHTS

- LED Elements - 12, Ultra Small
- Virtually No RFI/EMI noise emitted
- Meets SAE J1113-41 Class 5
- Die-Cast aluminum base
- Dimensions: Base Diameter-1.50", H-0.8"
- Available colors: **CLEAR**, **RED**, **AMBER**, **BLUE**
- Available in split **RED/BLUE** color
- Safe Low Voltage Wiring
- Includes Pre-Wired 10' cable
- Over 30 Flashing Patterns
- IP67 Rating

SL12IL-X LED INSERT



**Black Bezel - to securely
mount your LED light to
a flat surface (300-0104)**





IQ ELITE PRO SYSTEM

- High Performance Class D amplifier module.
- CAN Bus Communications
- Close Proximity Vehicle to Vehicle Light and Siren Synchronization.
- Program and control all features of your vehicle: lights, sirens, traffic director, Message boards.
- Easy to use configuration software.
- All outputs have short circuit,, reversed polarity and over-current protection.
- Supports up to 32 environment sensors.
- 12 fully programmable digital inputs (+12VDC or GND)
- 2 fully programmable Analog inputs
- Integrated battery voltage monitor
- Programmable for hands-free operation
- 21 Outputs max 12 Amps programmable from 1 to 100% power outputs.
- Supports unlimited expander modules, each module has 10 outputs. each line can control up to 255 level of intensity on 3 lights. Individual light control.
- Any Output can be programmed for Traffic Director control
- Any Output can be Programmed to be controlled by more than one button, Input or Temperature sensor using an intuitive function priority.
- Choice of 7 Control Heads—Control Head Keys are Full Color RGB Backlit, different colors possible for backlight, Key Press, and sequential keys.
- 255 Level Dimmer Control for push button or backlight on all keys
- Each button or input can be programmed to be ON/OFF, Momentary, Cycle, Timer Trigger, Double Click Short and Long Click.
- Built-in shut down to be able to operate the system for up to 13 hours after vehicle is turned OFF .
- Zero stand-by current consumption after timed shut down.
- System level programmable Low Voltage Disconnect.
- Programmable voltage threshold activation button group .
- Programmable button group voltage threshold activation
- Standard siren tones (WAIL, ELP, STINGER, HI-LO, AIR HORN) and INTER-CLEAR (multi-tone) can also accept WAV or MP3 Files .
- Air Horn momentary push button overrides all other siren tones.
- All control outputs are solid state outputs.
- 2 line color very low consumption OLED status display on certain touch pad.
- All outputs have diagnostic indicator LEDs for quick troubleshooting
- Any switch programmable for SHOTGUN timed out release
- All programs may be modified and stored for ease of service, with a simple export/ import process
- Custom labels, easy to replace w/spill proof membrane
- Digital Microphone with Crystal Clear sound with AGC
- Radio rebroadcast function
- Built-in and programmable flash-patterns
- Power and input/output cabling with connectors, standard
- All fuses and connectors easy accessible without removing covers
- Built-in beep alert, adjustable via software
- 3 built-in data connections
- Meets and exceeds all applicable SAE, California Title XIII, NFPA requirements with select D&R speakers, control and light heads
- Five Year Warranty



IQ PRO-TP Slide 21



IQ SERIES LIGHT / SIREN CONTROL SYSTEM

- Full function amplifier/control module
- Program and control all features of your vehicle: lights, sirens and traffic director
- Easy to use Windows configuration software
- All outputs have short circuit, reversed polarity and over-current protection
- Supports up to 3 temperature sensors modules
- 13 fully programmable analog inputs (+12VDC or GND)
- Integrated battery voltage monitor
- Single or Dual Siren Amplifier
- Programmable for hands-free operation
- Outputs: 12 @ 2Amp/ 8 @ 10Amp/ 1 @ 20Amp
- **Supports up to two Expander modules**, 10 outputs each
- Any output can be programmed for traffic director control
- Any output can be programmed to be controlled by more than one button, input or temperature sensor using an intuitive function priority system
- Supports 7 styles of control head keypads
- Three level dimmer control for push button backlight
- Each button or input can be programmed to be an ON/OFF, Momentary, Cycle or Timer trigger
- Built in shut down system to be able to operate the system for up to 13 hours after vehicle is turned OFF
- Zero stand-by current consumption after timed shut down
- System level programmable Low Voltage Disconnect
- Programmable button group voltage threshold activation
- Standard siren tones (WAIL, YELP, STINGER, HI-LO, AIR HORN) and INTER-CLEAR (multi-tone)
- Air Horn momentary push button overrides all other siren tones
- All control outputs are solid state outputs
- 3 line color very low consumption OLED status display
- All outputs have diagnostic indicator LEDs for quick troubleshooting
- Any switch programmable for SHOTGUN timed out release
- All programs may be modified and stored for ease of service, with

a simple export/import process

- USB port on each touchpad provides easy access for programming the system
- Custom labels, easy to replace w/ spill proof membrane
- PA microphone w/ plug in connector and 21' cable included
- Radio rebroadcast function
- Built-in and programmable flash-patterns
- Power and input/output cabling with connectors, standard
- All fuses and connectors easy accessible without removing covers
- Built in beep alert, adjustable via software
- 3 built in data connections
- Meets and exceeds all applicable SAE, California Title XIII, NFPA requirements with select D&R speakers, control and light heads
- Five Year Warranty



IQ EXPANDER MODULES

IQEXP-LC Low Current Expander



IQEXP-HC High Current Expander






F5M-IQTP



- Dimensions:
H: 3-1/2", W: 7-3/16", D: 1.0"

F5S-IQTP

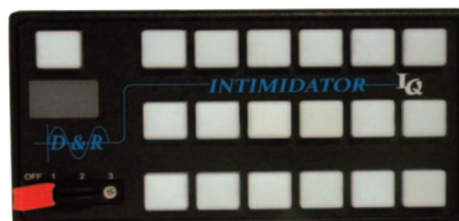

- Dimensions:
H: 3-1/2", W: 7-3/16", D: 1.0"

F5RM-IQTP



- Dimensions:
H: 3-1/2", W: 7-3/16", D: 1.0"

F5RS-IQTP




- Dimensions:
H: 3-1/2", W: 7-3/16", D: 1.0"

RDS16S-ETP



- Dimensions:
H: 2-1/2", W: 6-3/4", D: 1.0"

RDS17S-ETP

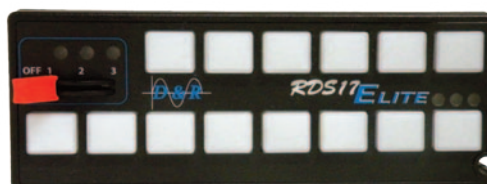

- Dimensions:
H: 2-1/2", W: 6-3/4", D: 1.0"

GALAXY-IQTP



- Dimensions:
H: 2-3/4", W: 4-7/16", D: 1.0"



LIGHT & SIREN CONTROLLERS

ENFORCER UNDERCOVER SIRENS



ES6200-IQ



ES6201-IQ

- ES6200-IQ siren uses microprocessor based technology to provide a compact electronic siren system for use in emergency vehicles
- Ideal choice for undercover applications
- Siren Mode - two available siren tones: Wail and Yelp
- Siren tones can be selected using the toggle switch from the remote controller
- Manual Mode - Air Horn
- Park Kill Mode - this will automatically interrupt the siren tones if they are engaged; this input is GND activated.

- ES6201-IQ siren uses microprocessor based technology to provide a compact electronic siren system for use in emergency vehicles
- Ideal choice for undercover applications
- Siren Mode - two available siren tones: Wail and Yelp
- Manual Mode - Air Horn
- Note: Manual mode will override the Siren mode
- Park Kill Mode - this will automatically interrupt the siren tones if they are engaged; this input is GND activated.

PROTEC FALCON PFIQ



General Specifications:

- Two models: PFIQ-12 and PFIQ-24
- Input Voltage:
PFIQ-12: 11 to 16 VDC
PFIQ-24: 22 to 28 VDC
- Input Fuse:
60 amps (external) for 12VDC
30 amps (external) for 24VDC
- Operating Temperature Ranges: -30°C to +65°C
- Standby Current:
50mA ± 10% during IGNITION OFF time-out
0mA after time-out

Siren:

- Frequency Range: 700 to 1640 Hz (nominal)
- Audio Output Power: 32 watts
- Amplifier Output Impedance: 11 Ohms
- Input Impedance: 600Ω (radio)



THUNDER: AUXILARY LOW FREQUENCY WARNING SYSTEM

- Models:
THUNDER-1 Kit includes
1 x TH-LFA (Thunder Low Frequency Amplifier Siren Box)
1 x 189-0200 (Thunder Speaker)
THUNDER-2 Kit includes
1 x TH-LFA (Thunder Low Frequency Amplifier Siren Box)
2 x 189-0200 (Thunder Speaker)
- Universal Mounting Bracket or optional vehicle specific mounting brackets available
- An add-on to any 100/200 watt siren system to boost vehicle sound
- Compatible with all vehicles primary siren tones
- Low frequency siren amplifier and speaker included
- Uses the primary siren speaker output

**935-0095A
Speaker Bracket
to mount Thunder
speaker**



SPEAKERS & SPEAKER BRACKETS

DRCS100



- DRCS100 is one of D&R's most innovative cast 100 W speakers
- Includes bail bracket
- Exceeds Class A SAE J1849 requirements
- Dimensions: W-6.5", H-5.375", D-3.0"


- Exceeds Class A, SAE J1849 requirements
- Dimensions: W-6.85", H-6.35", D-2.78"
- All weather nylon composite black housing with front loaded 100W speaker driver

DRCS110




AVAILABLE SPEAKER BRACKETS:

935-0067A




- Single pushbar speaker bracket
- Bracket for DRCS110

935-0079A




- Universal bracket to mount DRCS110

935-0094A




- 2020 Ford Utility DRCS110 110 Speaker Bracket behind grill

935-0095A




- 2020 Ford Utility Thunder Speaker Bracket

935-0086A




- 2020 Ford F-150 Thunder Speaker Mounting Bracket

935-0076A




- 2020 Ford F-150 EcoBoost DRCS110 Speaker Mounting Bracket

935-0075A



- 2020 Ford F-150 DRCS110 Speaker Mounting Bracket

935-0083A




- 2020 Dodge Charger Thunder Speaker Mounting Bracket

935-0049A



- 2020 Dodge Charger DRCS100 Speaker Mounting Bracket

935-0070A




- 2020 Dodge Caravan DRCS100 Speaker Mounting Bracket
- Use with 935-0066A Adapter Bracket to mount DRCS110

935-0069A




- 2020 Dodge Durango DRCS110 Speaker Mounting Bracket

935-0084A




- 2020 Dodge Ram 1500 Thunder Speaker Mounting Bracket

935-0089A



- 2020 Chevy Tahoe Thunder Speaker Mounting Bracket

935-0071A



- 2020 Chevy Tahoe DRCS100/DRCS110 Speaker Mounting Bracket

FLASHERS & MODULES


FS2000-S

- Basic general purpose relay flasher.
- 16 Amp/100W



FS2100-S

- General purpose solid state flasher.
- 16 Amp/100W



FS2200-S

- Multi-mode solid state headlight flasher.
- DRL compatible



FS2600-S

- Tail light flasher
- Flashes tail lights against reverse light
- Includes brake/tail light blackout mode



ANTI-THEFT MODULE (ADT30A)

- Automatic Anti-Theft module
- Activation upon door opening
- Can NOT be used with Push Button Start



OEM DRL DEFEAT MODULE

DRLDF-PIU DEFEAT FLASHER MODULE

FEATURES

The DRLDF-PIU Flasher Module is a compact state of the art module designed to defeat the DRL and marker lights for Ford Interceptor Utility 2022+ models.

- Easy plug and play install No cutting or soldering required.
- Same connectors as OEM
- Defeat works only when OEM light switch is in the off position.



BATTERY WATCHDOG

D&R WATCHDOG is designed to enable operation of vehicle accessories with the vehicle shut off without fear of battery drain inhibiting engine start. Reducing unnecessary idling promotes fuel cost savings and reduces maintenance. Allows for a safe and simple way to add electronic accessories to any of today's complex automotive electrical systems providing the security of an isolated ignition power source with an adjustable off delay. By using a D&R WATCHDOG battery protector you no longer need to worry about having a drained battery or leaving your key in the ignition to keep needed electronics powered up.

WATCHDOG-B60



SPECIFICATIONS

- Operating Voltage: 9V - 18V
- Low Voltage Disconnect: 11.5V *
- High Voltage Disconnect: 18V
- Stand-by Current: 8 mA
- Operating Current: 350 mA+LOAD
- Min. Time Delay: 2 min.
- Override Time Delay: 2 min..
- Max. Load Current (with correct gauge wire)
- Watchdog-B60: 60A
- Watchdog-B120: 120A
- Selectable Time Delay: 2 min.-13hrs.

WATCHDOG-B120



*NOTE: Voltage disconnect (threshold voltage) is where the watchdog takes action. The operating voltage is the range where watchdog monitoring circuit operates regardless of the action taken by the watchdog.



YOUR POWER SOURCE & BATTERY MANAGEMENT FOR ALL YOUR EQUIPMENT

The PDU-16SS and PDU-6SS provide a direct, easily traceable route to the input power source avoiding interfering with the vehicles factory wiring harnesses.

Features:

- Programmable Low Battery Voltage Shutdown
- Programmable Timed Shutdown
- Zero current consumption in Sleep Mode

PDU-16SS



Specifications:

Voltage Range: 11-18 VDC

Maximum Current Load:

10A per output at 15A

30A for heavy duty output, fused at 50A

100A total maximum current per PDU

Standby Current: 30mA

Sleep Mode: 0mA

Dimensions: L-10.55" / W-4.26" / H-1.1"

Specifications:

Voltage Range: 11-18 VDC

Maximum Current Load:

10A per output at 15A

30A for heavy duty output, fused at 50A


100A total maximum current per PDU

Standby Current: 0mA

Sleep Mode: 0mA

Dimensions: L-12.0" / W-4.0" / H-1.5"

PDU-31SS

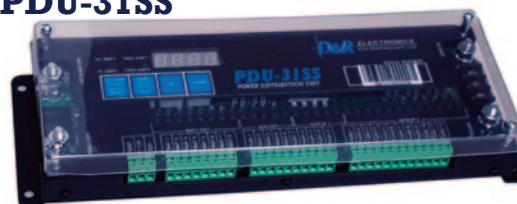

PDU-6SS



Specifications:

Voltage Range: 11-18 VDC

Maximum Current Load:

10A per output at 15A

25A for heavy duty output, fused at 40A

50A total maximum current per PDU

Standby Current: 30mA

Sleep Mode: 0mA

Dimensions: L-5.3" / W-4.26" / H-1.1"

PDU-2SS-12



Specifications:

Voltage Range: 12-24 VDC

Maximum Current Load:

40A at output 1

20A at output 2

Standby Current: 25mA

Sleep Mode: 0mA


Dimensions: L-4.35" / W-2.5" / H-1.25"

- Organizes vehicle wiring runs
- All power connections at one central location
- Provides direct power, ignition power and timed power
- Easy installation, easy connection of accessory equipment

- Visual condition of circuits
- Make a safer electrical connection to vehicles
- Built-in battery Watchdog (battery discharge protector)
- Fast and reliable vehicle installations



PDU14-K

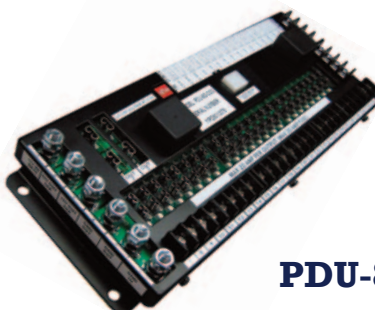

PDU-8S



PDU42WB

GENERAL INFORMATION ABOVE, FOR DETAILS ON EACH MODEL, VISIT OUR WEBSITE



Dovetail is a universal mounting solution supporting the changing Galaxy Smart phone environment.

A mounting solution that enables docking various models of Galaxy Smart phones, without modifications.

Provides charging to smartphones.

Enjoy a vivid video experience

HD+, FHD, and WQ HD resolutions

Change the default speakers from your mobile device to a monitor, or other audio devices

Allows for dual screen display



■ Phone easily docks in and connects

DESKTOP UNIT



Placeholder Image

VEHICLE UNIT



AVAILABLE PHONE CASES:

N9



N10+



S9



S10



S10e



S20Fe




S21




■ Phone cases separate and attach


CONSOLES

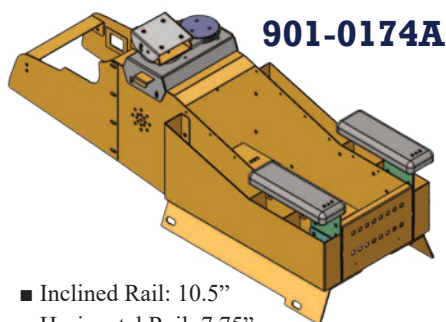**901-0174A**

- Inclined Rail: 10.5"
- Horizontal Rail: 7.75"
- Console Width (Outer Dimension): 8.4"

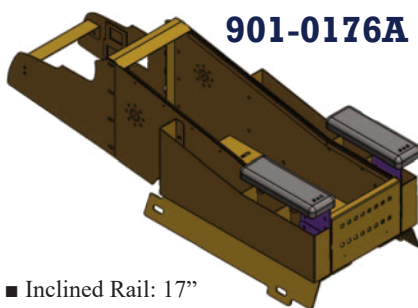
**901-0176A**

- Inclined Rail: 17"
- Horizontal Rail: 7.75"
- Console Width (Outer Dimension): 8.4"


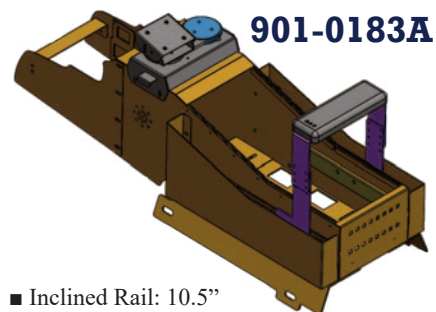
**901-0183A**

- Inclined Rail: 10.5"
- Horizontal Rail: 7.75"
- Console Width (Outer Dimension): 8.4"


- Designed to fit 2021-2023 Gen 1 Chevy Tahoe
- Arm Rest 904-0135A and 904-0136A (Sold Separately)
- Console Pocket PS - 801-0596A (Sold Separately)
- Accommodates the LT7600 (not included)
- Floor Plate not required for installation

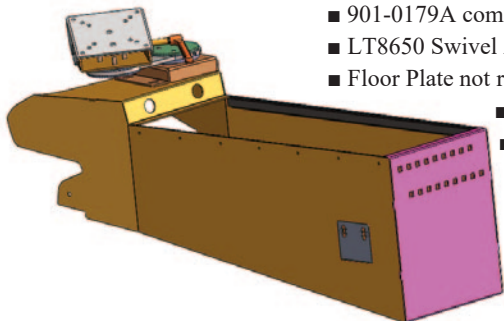901-0178A

- Designed to fit 2021-2023 Dodge Durango Police Pursuit Vehicle
- 12V Outlet x 2 included
- 901-0179A comes with Sliding Armrest
- LT8650 Swivel Arm (906-0969A) Not Included
- Floor Plate not required for installation
- Horizontal Rail: 21.75"
- Console Width (Outer Dimension): 8.4"

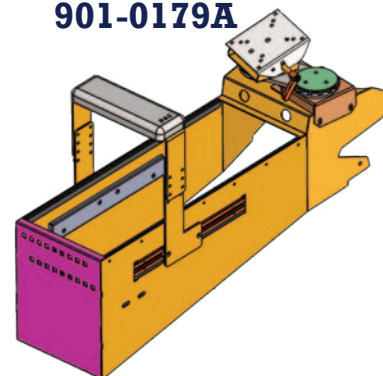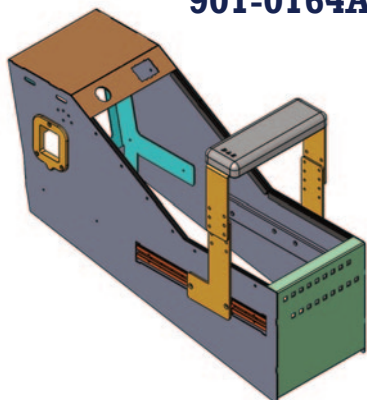
901-0179A**901-0164A**

- Inclined Rail: 10.5"
- Horizontal Rail: 7.75"
- Console Width (Inner Dimension): 8"

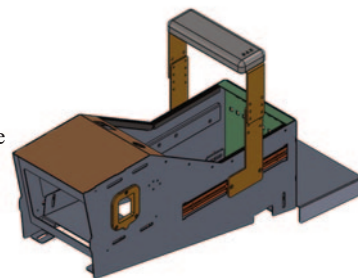901-0164B


- Designed to fit 2021-2023 Ford Interceptor Utility
- Console with sliding armrest
- OEM USB & 12V Outlet Mounting
- Allows for mounting up to 5 pieces of remote head equipment
- Floorplate not required to install this console
- Accommodates the LT7600 (not included)

- Inclined Rail: 7.75"
- Horizontal Rail: 7.75"
- Console Width (Inner Dimension): 8"

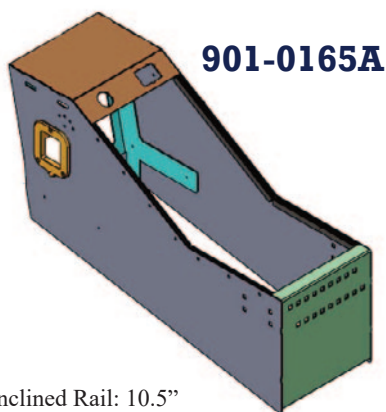
**901-0165A**

- Designed to fit 2021-2023 Ford Interceptor Utility
- OEM USB & 12V outlet mounting
- Allows for mounting up to 5 pieces of remote head equipment
- Floorplate not required to install this console
- Accommodates the LT7600 (not included)


- Inclined Rail: 10.5"
- Horizontal Rail: 7.75"
- Console Width (Inner Dimension): 8"

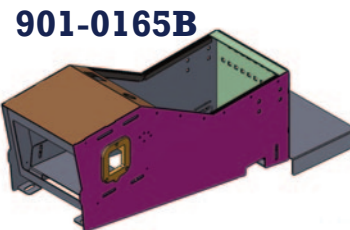**901-0165B**

- Inclined Rail: 7.75"
- Horizontal Rail: 7.75"
- Console Width (Inner Dimension): 8"

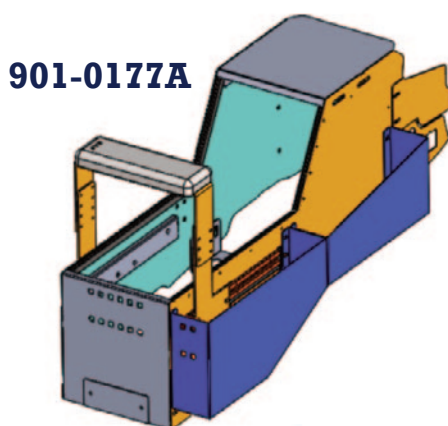
**901-0177A**

- Designed to fit 2021-2023 Ford F150
- Console with sliding armrest
- Front PS Side Pocket (801-0796A) included
- Rear PS Side Pocket (801-0797A) included
- Accommodates the LT7600 (not included)
- Floor Plate not required for installation
- Inclined Rail: 7"
- Horizontal Rail: 14.75"
- Console Width (Inner Dimension): 8"

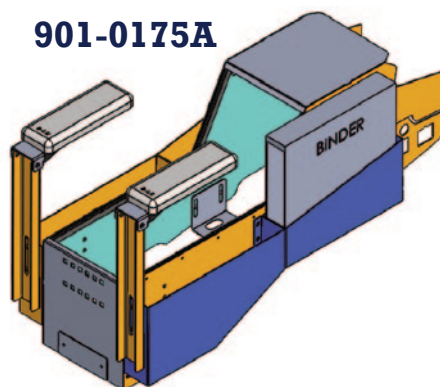**901-0175A**

- Designed to fit 2021-2023 Ford F-150
- Front PS Side Pocket (801-0796A) included
- Rear PS Side Pocket (801-0797A) included
- Floor Plate not required for installation
- Inclined Rail: 7"
- Horizontal Rail: 14.75"


GEN. II CONSOLES

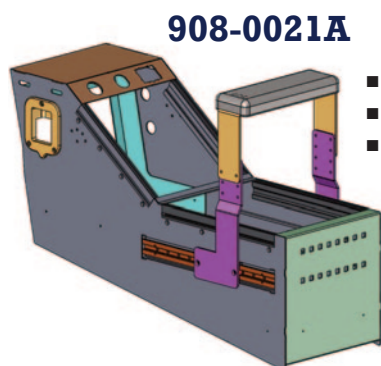**908-0021A**

- Inclined Rail: 8.5"
- Horizontal Rail: 10.5"
- Console Width: 8.63"

- Designed to fit 2020 Ford Interceptor Utility
- OEM USB & 12V outlet mounting
- Allows for mounting up to 5 pieces of remote head equipment
- Floorplate not required to install this console

- Accommodates the LT7600 (not included)

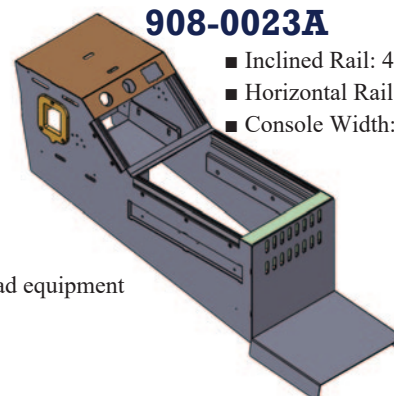
**908-0023A**

- Inclined Rail: 4.5"
- Horizontal Rail: 11.5"
- Console Width: 8.63"

- Accommodates the LT8650 (not included)


MOUNTING PLATES AND LEG KITS

905-0130A

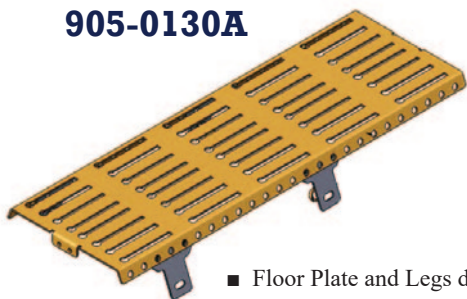

■ Floor Plate and Legs designed for 2015-2020 Chevy Tahoe

905-0106A

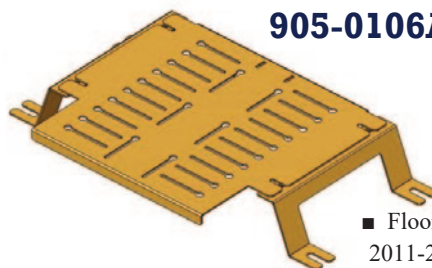


■ Floor Plate & Leg Kit for 2011-2020 Chevy Express

905-0146A




■ Floorplate kit designed for 2020 Chevy Silverado

905-0116A

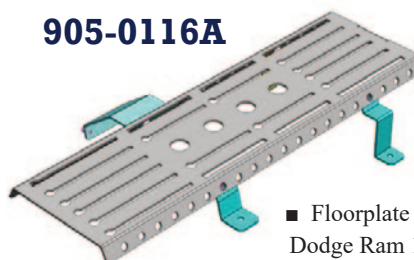

■ Floorplate kit for 2014-2020 Dodge Ram 1500 /2500 /3500

905-0135A

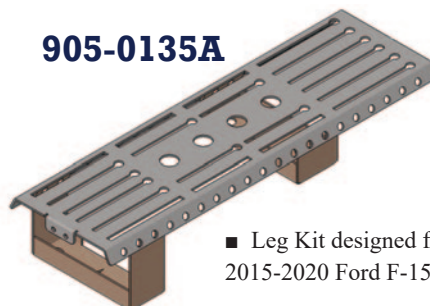

■ Leg Kit designed for 2015-2020 Ford F-150.

905-0148A



■ Floorplate Kit designed for 2020 Ford Interceptor Utility

MAGNETIC MIC KIT

Magnetic Mic Helps You Stay Focused on the road when picking up and returning the radio mic to its holder. It's the easy to install alternative to a conventional metal hang-up mic clip, consisting of a Magnetic Base for the vehicle dashboard or console and a disc-shaped Microphone Adapter for the mic itself.

The magnetic base replaces the conventional metal hang-up mic clip used with most two-way radio microphones. With its sleek unibody construction, there are no sharp edges for the user to worry about. Constructed from aerospace grade materials, Magnetic Mic is incredibly durable and ready for years of use.

HOW IT WORKS?

Magnetic Mic enhances safety by reducing distracted driving. This easy-to-use conversion kit helps drivers stay focused on the road when picking up and returning a CB or emergency radio microphone to its holder.



ARMRESTS

904-0158A



Console mount
Armrest
with D&R
logo pad

904-0159B




Slim Floormount
Armrest with
D&R logo pad

904-0135A




Soft molded rubber
Side mounting Console
Armrest-Driver Side
904-0136A Passenger Side

904-0180A

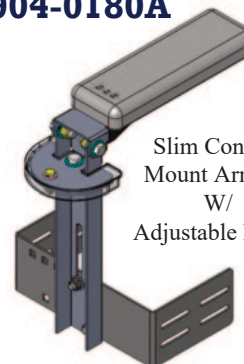


Slim Console
Mount Armrest
W/
Adjustable height

**904-0135B
Tall Armrest**



- Soft Molded Rubber Side Mounting Console Armrest - Driver Side.
- Height 12.985 inches to top of armrest

**904-0136B
Tall Armrest**



- Soft Molded Rubber Side Mounting Console Armrest - Passenger Side.
- Height 12.985 inches to top of armrest

CA-0211



- Printer Armrest designed to enclose and protect the PocketJet printer & paper spool
- Compact and ideally suited to mount in the confined space between the driver and passenger seats of all mid and full sized vehicles
- **CA-0210** is same as CA-0211 but mounts to the back of the D&R console Printer not included.

CA-0115



Adjustable
armrest,
mounts to rear
of console

LED MAPLIGHT

CA-0128 / CA-0129 / CA-0130

- Available in: 6", 12" and 18" lengths
- 3 Phase light intensity 1 Watt LED (Low, Medium, High)
- Available in 12 /24V
- 280 degree Turning Radius
- 1 Watt Red and White LED
- **USB plug option available:**
CA-0128-USB, CA-0129-USB, CA-0130-USB



STORAGE POCKETS

CA-0104




- Ticket book holder
- Design to mount in console
- Dimensions:
L-3.5", W-8.0",
H-6.25"

CA-0104S



- Ticket book holder
- Design to mount in console
- Dimensions:
L-3.5", W-8.0", H-3.0"

CA-0105

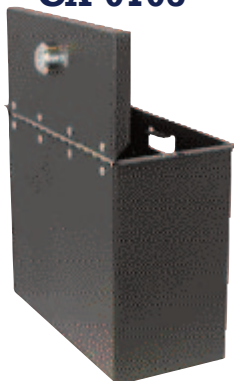


- Ticket book holder with keyed locking lid
- Design to mount in console
- Dimensions:
L-3.5", W-8.0", H-6.0"

CA-0105S



- Ticket book holder with keyed locking lid
- Design to mount in console
- Dimensions:
L-3.5", W-8.0", H-3.0"

CA-0153A



- Ticket book holder with keyed locking lid
- Design to mount in console
- Dimensions:
L-3.5", W-8.0", H-3.0"

POWER OUTLETS

CA-0101



- Dual outlet 12V power accessory
- Individually switched, fused and backlit
- 15 Amp max per output

14.0553



- Triple outlet 12V power accessory accommodate most auxiliary devices like spot lights, air compressors, laptops and radios
- 15A automatic re-set circuit breaker provides overload protection
- Sturdy, fully enclosed, black ABS plastic box
- Includes a 3' wire for simple installation.
- Dimensions:
L-6.0", W-1-5/8"

CA-0103



- Triple outlet 12V power accessory
- Mounts in console.
- Dimensions:
L-8.0", W-3.5"
- CA-0103S Dim:
L-8.0", W-1.5"

CA-0108



- Power Plate
- Dual USB
- Two 12V outlets
- Installs in console
- Dimensions:
L-8.0", W-1.75"

CUPHOLDERS

CA-0107LS




- Dual cupholder (one regular size cup and one large cup)
- Mounts in console
- Dimensions:
L-4.25", W-8.0"

CA-0107



- Dual cupholder (regular cup size)
- Mounts in console
- Dimensions:
L-3.5", W-8.0"

904-0148A



- Single Large cupholder
- Mounts to floor plate or flat surface
- Dimensions:
L-4.31", H-3.31"

CA-0117L



- Dual cupholder w/two large cups
- Mounts to floor plate or flat surface
- Dimensions:
L-5.69", W-8.56"

CA-0117



- Dual cupholder with two regular cup size
- Mounts to floor plate or flat surface
- Dimensions:
L-4.88", W-8.0"

TABLET/LAPTOP TRAYS & MOUNTS

LAPTOP/TABLET MOUNTS

LT7600



- Secures to top of D&R Console
- Dual 360 Degree swivels allow the computer to swing from the driver to the passenger seat
- LT7600 accepts all D&R computer specific trays, universal trays and popular keyboard trays
- Tilt adjustment allows the user to tilt the computer to a comfortable working position
- LT7600-A Same as LT7600 but with locking pin

LT6600 SERIES MULTI-ADJUSTABLE LAPTOP/TABLET HD MOUNTING PEDESTALS

- LT6600 Passenger Side Mount connects to the passenger seat bolts with the use of a vehicle specific mounting plate
- Full featured computer mount with height, tilt, dual 360 swivel and extension adjustments
- Utilizes laser cut swivel components to provide a compact unit ideal for small to full size cars and SUV's
- The LT6600 accepts all D&R laptop or specific trays and universal trays

FUNCTIONALITY:

- Height Adjustment: height can be set by the user:
LT6600-A from 13.5"- 21.50"
- Extension Adjustment: this adjustment allows the user to tilt move the computer towards or away from their reach to a comfortable working position (12"-16")
- All mounts include braces for mount support
- LT66MK Mounting Kits available for a variety of vehicles



MOUNTING EXAMPLES:

LT66MK 2021 Chevy Tahoe Floor Mount (906-0986A)




- LT6600 sold separately
- Comes with two Tie-Down Strap Mounts

LT8650 Adjustable Rail Mount (906-0988A)



Slide Tray Low Profile Flat Surface Mount (906-0968A)




LAPTOP/TABLET TRAYS

907-0281A



Clamshell Panasonic FZ-G1 Tablet Dock with
iKey SB-87-TP-M USB Keyboard Tray.

907-0151D

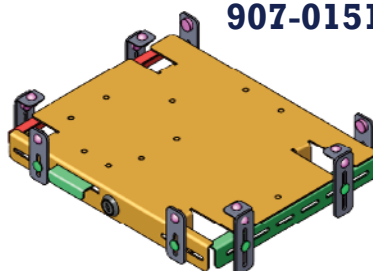

Universal locking tray 14+ sized laptops

DOCKING STATIONS

Docking Station Features:

- Designed using MIL-STD-810F requirements
- Floating docking connector for ease docking alignment
- Internal protected circuit board
- Compression latch
- Plastic end caps to prevent sharp corners
- Brass machined pins for ease of computer placement
- Lockable keyed alike
- Pre-drilled holes aligned for use on all D&R mounts

PANASONIC CF33 DOCKING STATION NOW AVAILABLE,

PLEASE CONTACT US AT 800-538-7338 FOR DETAILS

CF33



Ports:

- Serial: DB9 (9-PIN) connection (2)
- VGA: (1)
- USB:
 - Fully-powered USB 2.0 (4)+(1 Front panel)
 - USB 3.0
- Ethernet: RJ45 Ethernet (2)
- Headphone / Speaker: Stereo (1)
- Noise filtering: Yes
- Input Voltage: 15.6V DC
- Dual antenna coaxial connection
- Built-in DC power supply:
 - 10-24VDC Input,
 - 15.6VDC Output
- Includes 6" input cable w/cigarette lighter plug adapter
- 16Amp built-in fuse

CF54



- Serial Port: DB9 (9-PIN) connection (1)
- VGA: (1)
- USB:
 - Fully-powered USB 2.0 (2)+USB 3.0 (2)
- Ethernet: RJ45 Ethernet (1)
- Headphone / Speaker: Stereo (1)
- HDMI Port (1)
- Input Voltage: 15.6V DC
- Dual antenna coaxial connection
- Built-in DC power supply

DS100 POWER SUPPLIES



Power Supply

- Dimensions: 1.0"H x 5-14/16"L x 2.25"D
- Output is -15.6V DC
- Input is -6V to +24V DC
- Optional Universal DC I/P Power Supply
 - Internal: Direct wired to PCB
 - External (as shown)
- Required cables are included with the Power Supply

Available Power Supplies:

- DS100-12V
- DS100- 15.6-8A
- DS100-16V
- DS100-20V


PANASONIC G1 DOCK



- 16V external power supply
- Designed using MIL-STD-810F requirements
- Floating docking connector for ease docking alignment
- Internal protected circuit board
- Compression latch
- Brass machined pins for ease of tablet placement
- Available with a G1 handstrap model
- Rugged steel with black powder coat finish
- Lockable keyed alike
- Pre-drilled holes aligned for use on all D&R mounts

Ports:

- USB - 2
- Serial (1) D sub 9 pin
- 1 LAN port connector (optional ruggedize LAN expansion hub available)
- External video (D-Sub 15 pin)
- 16 V DC I/P Power jack
- 1 HDMI Port

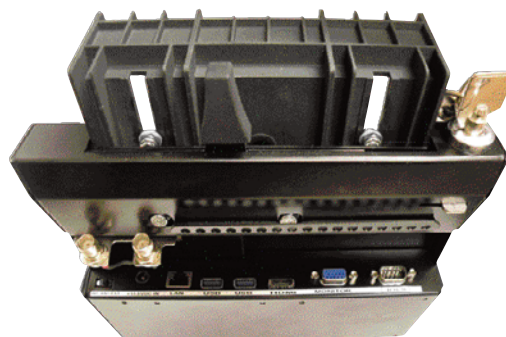

215-0164



215-0167



■ Input / Output cables for the power supply and dock

BROTHER POCKETJET FACEPLATE




801-0163B

**Faceplate for Brother PocketJet
Printer with Dual Cup Holder**


■ Printer and Paper Roll not included

**GLOVE BOX
PRINTER SETUP**

2020 Ford Utility Glove Box Printer Conversion Kit (918-0051A)

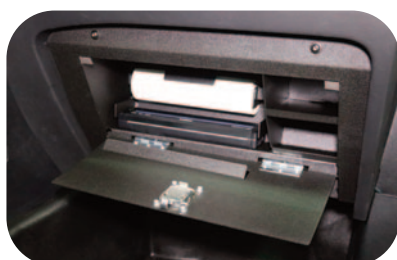


- Houses - Brother Printer Models PJ600 or PJ700 with paper roll
- Features 2 small storage compartments on side
- Print while glove box is closed
- Hidden wiring provides clean finish
- Easy printer removal for maintenance
- Latching System
- Simple installation

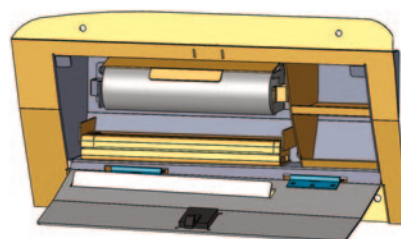

SUBFRAMES


A subframe is required for the proper/safe installation of any type of Equipment Storage Solution in a vehicle.

933-0239A

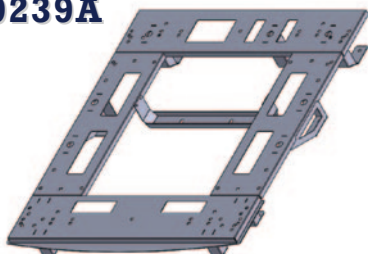


- 2021 Chevrolet Suburban Full Subframe

933-0238A

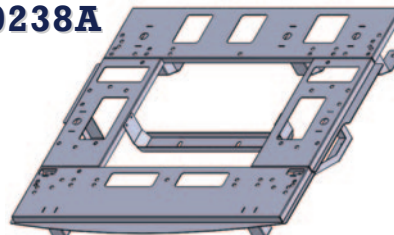


- 2021-2023 Chevrolet Tahoe Full Subframe

933-0137A

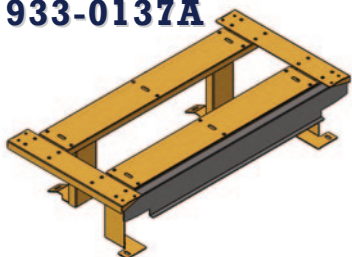

- Designed for 2021-2023 Ford Civilian Explorer
- Trunk Raised Frame Shelf


933-0130A

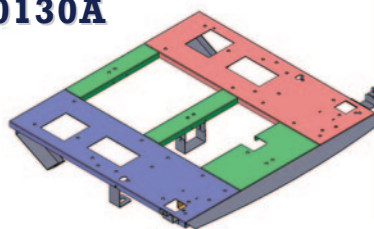

- Subframe for installing storage cabinets.
- Designed for 2021-2023 Ford Expedition


933-0133A

- Designed for 2021-2023 Interceptor Utility
- Liftable subframe supportS the weight of unloaded cabinet
- Specifications:
Width - 40.5"
Height - 7.16"
Depth - 43.17"

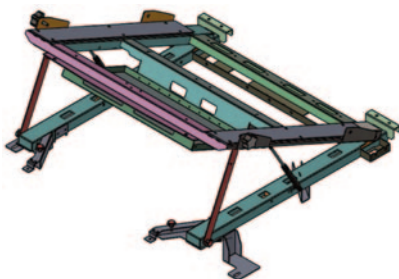


933-0135A

- Designed for 2021-2023 Ford Utility Interceptor.
- Optional top cover plate 833-1632A (order under 933-0136A)
- No Tire Access
- Specifications:
Width - 40.25"
Height - 7.96"
Depth - 44.95"

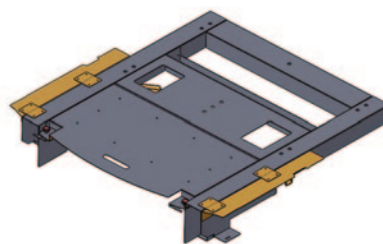


933-0132A

- Designed for 2021-2023 Ford Interceptor Utility
- Utility trunk Raised Frame Shelf
- Specifications:
Width - 47.71"
Height - 15.50"
Depth - 29.00"

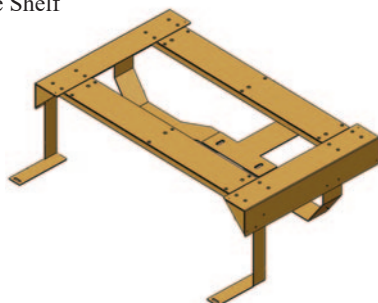

933-0138A



- With Tire Access
- Subframe designed for 2021-2023 Utility Interceptor
- Subframe fits only cabinets with 20" Depth


ELECTRONICS STORAGE BOXES

934-0751A & 933-0105A

- Electronics Enclosure (934-0751A) mounted on single drawer cabinet (933-0105A)
- Dimensions:
934-0751A: W-40", D-19.50", H-16"
933-0105A: W-40 1/4", D-24", H-12"
- Cabinet constructed from 0.09" (11ga) Aluminum
- Front Locking Pad Latch with dual deadbolt to keep drawer cabinet closed
- Grab bar full width of cabinet to help with opening
- Rubber lined drawer bottom and cabinet top
- Adjustable dividers running front to back
- One pair 24" Heavy duty ball bearing slides 500lbs capacity
- NOTE: NO SPARE TIRE ACCESS

934-0751A

933-0105A




Driver: 45-PC1750 Battery 150 Amp Circuit Breaker 150 Amp Circuit Breaker 40A Relay



934-0526A

Electronics Storage Box comes in 3 different sizes:

- 934-0526A — 40" x 24" x 10"
- 934-0526B — 40" x 18" x 7"
- 934-0526C — 40" x 18" x 10"




EQUIPMENT STORAGE SYSTEMS

Contact Us for full listing of our Equipment Storage Systems

933-0102A


- Designed for 2021-2023 Dodge Durango
- Single drawer
- Lightweight aluminum material
- Hard black epoxy paint

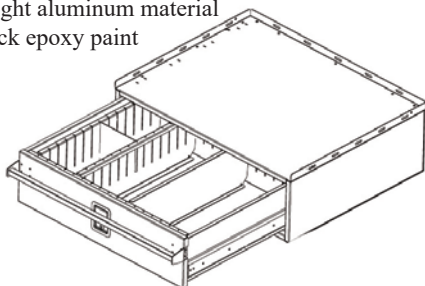

934-0880A

- Designed for 2021-2023 Ford Utility Interceptor.
- Single drawer with Electronics Drawer create a perfect storage solution for the back of your Interceptor Utility vehicle.
- Wire management arm and removable electronics tray located in Electronics Drawer

- Specifications:
- Width - 40.00"
- Depth - 30.11"
- Total Height - 12.09"
- Bottom Electronics Drawer Height - 4.29"
- Top Single Drawer Height - 6.44"

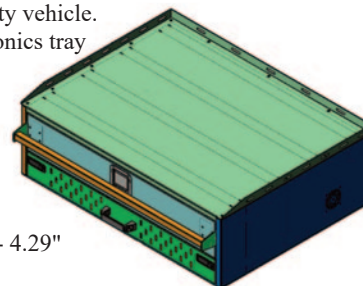


WEAPON STORAGE/MOUNTS

Dodge Charger Trunk Gun Mount (936-0429A)



Gun Tree Weapon Mount (934-0412A)




EFT Gun Tree Weapon Mount (934-0009A)




Gun Tree Weapon Mount (934-0148A)




Rifle Box Storage (934-0392A)



Gun Tree 2-Weapon Mount (934-0317B)




K9 KENNELS

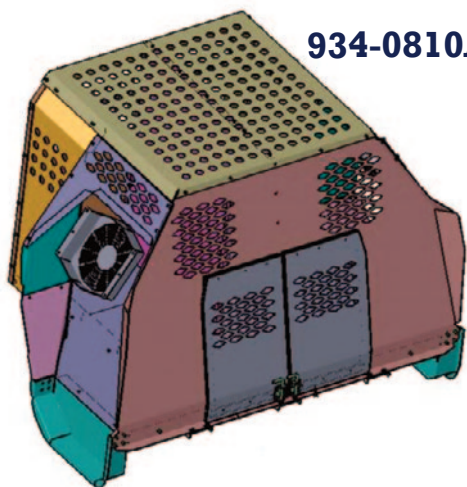

934-0810A


- Designed for 2015-2020 Chevy Tahoe
- Dual K9 Kennel
- Front Sliding doors
- Cages are versatile, spacious
- 1/4" floor rubber mat
- Keeping your dog safe and secure
- Easy to clean

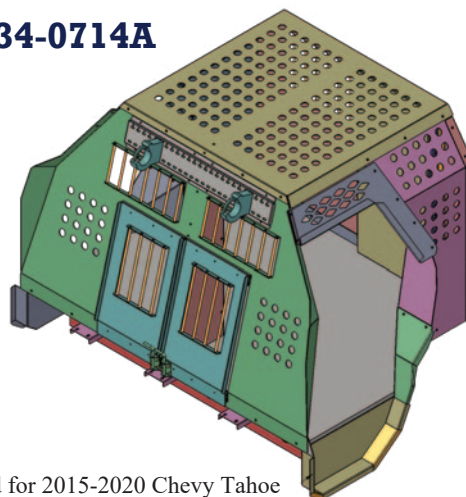

934-0714A


- Designed for 2015-2020 Chevy Tahoe
- K9 Kennel for two dogs with center door assembly
- Each cage is custom build to the dimensions of your vehicle
- Keeping your dog safe and secure
- DS and PS front slide door
- Gun mount bracket
- Front Sliding doors
- Cages are versatile, spacious
- 3/4" floor rubber mat
- Easy to clean

934-0752A

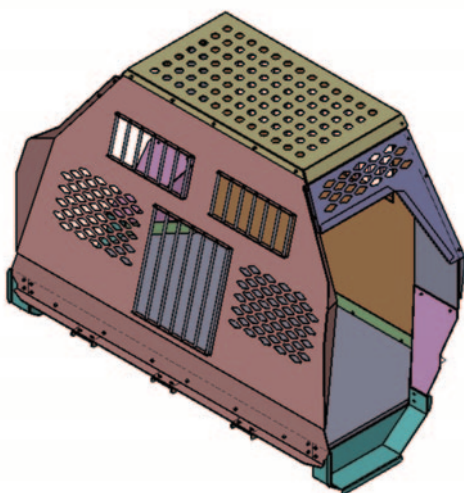


- Designed for 2015-2020 Chevy Tahoe
- Sliding door could be easily add in place of front bars
- K9 Kennel for single dog
- DS and PS front slide door
- Cages are versatile, spacious
- 1/4" floor rubber mat
- Keeping your dog safe and secure
- Easy to clean

934-0913A

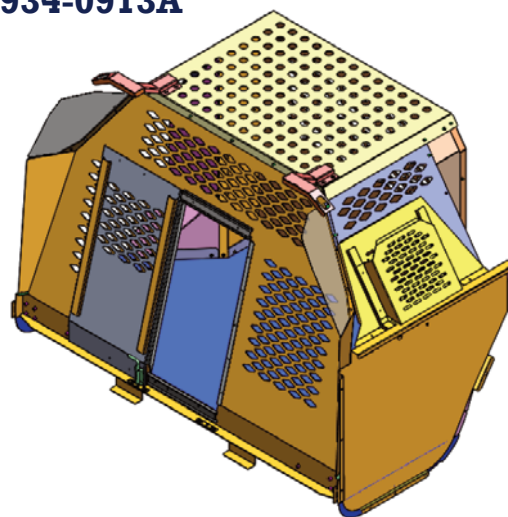


- Designed for 2021-2023 Chevy Tahoe

934-0884A

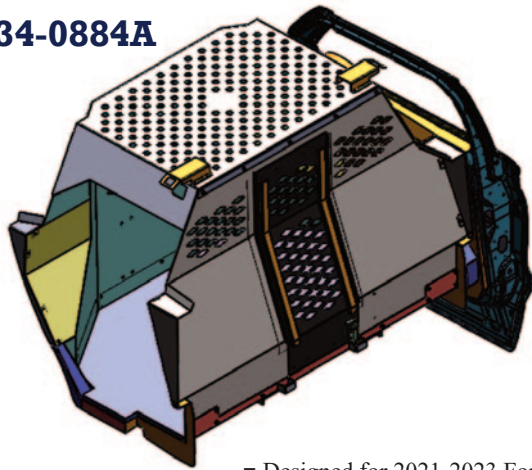


934-0887A

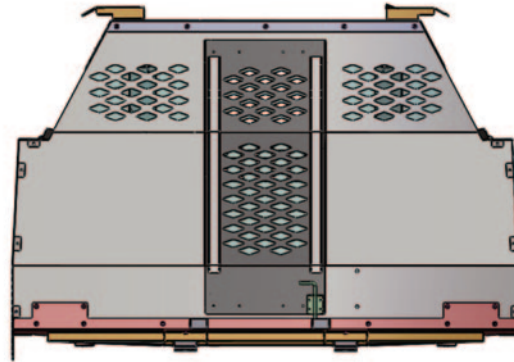


- Designed for 2021-2023 Ford Interceptor Utility
- Full K9 Kennel w/Speaker, Airbag compatible
- Each cage is custom build to the dimensions of your vehicle
- Air ducting system that connects to OEM Rear Vents (must have rear Air Packaging)
- 10" Fan (optional)
- 3/4" Rubber mat
- Two 14" Heavy Duty Slides used for Dog door
- Cages are versatile and spacious
- Keeping your dog safe and secure

934-0934A

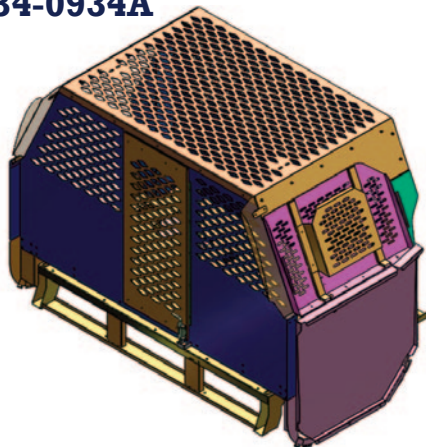

- Designed for 2021-2023 Ford F150

934-0729A

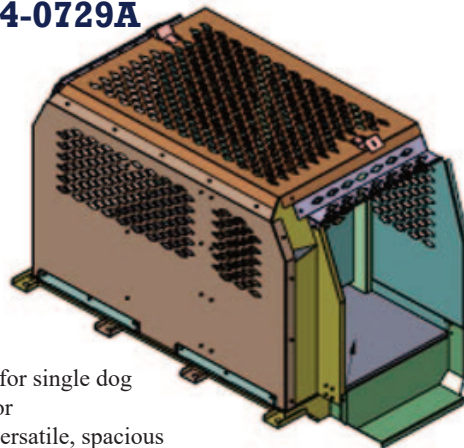

- K9 Kennel for single dog
- Sliding Door
- Cages are versatile, spacious
- K9 Kennel designed for 2015-2020 F-150 Super Crew Cab Pickup
- 3/4" floor rubber mat
- Keeping your dog safe and secure
- Easy to clean

K9 MODULE ACCESSORIES / OPTIONS


- | | |
|-----------------------|----------------------------------|
| ■ Hot-N-Pop Kit | ■ Water Bowl |
| ■ Fans | ■ Dual Colour Interior Light Kit |
| ■ Air Circulation Kit | |

PLEASE CONTACT US FOR MORE DETAILS ON K9 KENNEL CUSTOMIZATION


(CONTACT INFORMATION ON BACK COVER)

DOOR SKINS

**2015-2020 Chevy Tahoe, F150
Door Skin Pair (937-0335A)**

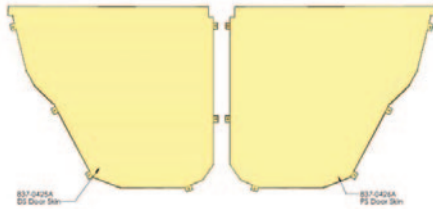

**2021-2023 F150 Door
Skin Pair (937-0340A)**

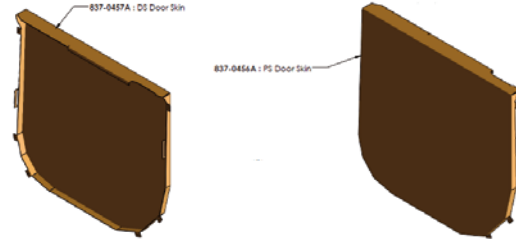

**2015-2020 Dodge
Charger Door Skin
Pair (937-0181A)**





**2015-2020 Ford
Interceptor
Utility Door
Skin Pair (937-0318A)**





REAR WINDOW GUARDS


2021-2023 Ford Interceptor Utility Window Guards (937-0362A)

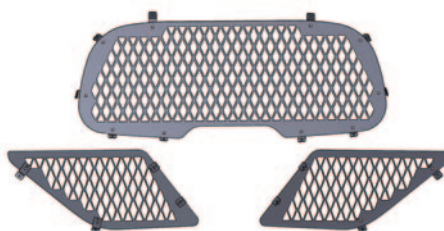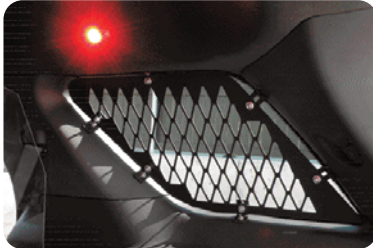

**2015-2023 Chevy Tahoe
Window Guards (937-0336A)**

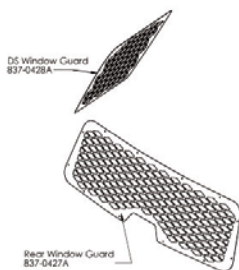


**2019-2023 Ford Expedition
Window Guards (937-0357A)**

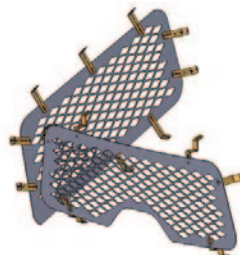


CARGO PARTITIONS

**2021-2023 Chevy Tahoe
Full Cargo Partition
(938-0157A)**




**2021-2023 Ford Interceptor
Utility Raised Subframe
Partition (938-0150A)**

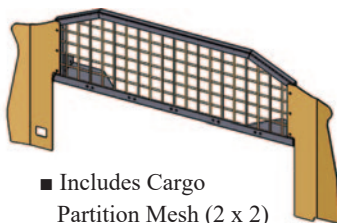


■ Includes Cargo
Partition Mesh (2 x 2)


**2015-2020 Ford Transit
Rear Cargo Partition
(938-0103A)**



**2020 Ford
Interceptor
Utility Cargo
Partition (938-0079A)**




**2020 Ford
Interceptor
Utility Cabinet
Top Partition
(938-0084A)**



WINDOW BARS

**2021 Chevy Tahoe Window
Bars DS & PS (937-0367A)**

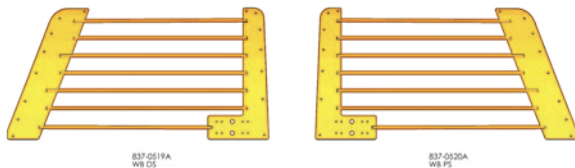


837-0519A
WB DS

837-0520A
WB PS


**2021-2023 Ford F150 WG
DS & PS (937-0342A)**




**2021-2023 Chevy
Tahoe Window Bar
Light Kit (933-0138A)**

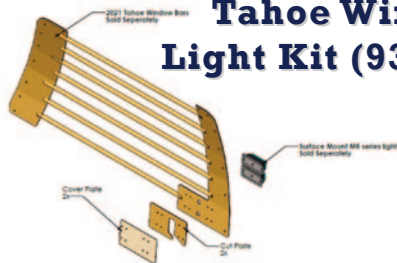

**2021-2023 Ford
Interceptor
Utility
Window Bars
Driver/Passenger Side
Light Kit (937-0361A)**



**2021-2023 Ford Interceptor Utility Window Bars
Driver/Passenger Side (937-0360A)**

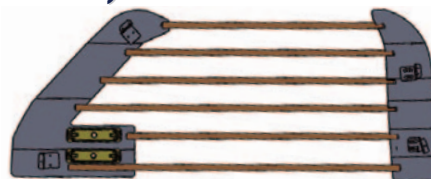

- Rear window bar is offering protection from windows being kicked out by restrained prisoners while placed in the back seat.
- Designed to fit with rear partition cages by Setina Manufacturing.
- Optional: Light Bracket for Genesis or MS6 lights - 937-0361A

CUSTOM BUILDS

D&R Electronics has been working with clients to design and build custom mobile work stations to meet detailed requirements that are necessary when stationed in the field. From custom table tops and storage solutions to power management and lighting fixtures, D&R has your fleet covered whether you require a mobile command center or an on the go work station for your fleet service technicians. For custom mobile solutions please contact D&R Electronics today to set up your free consultation with our design team. Until then, check out some of our more recent builds below!

MOBILE COMMAND CENTER


DESK WITH WORKING LIGHTS



DUAL COLOUR OVERHEAD INTERIOR LIGHTS




FILING CABINET

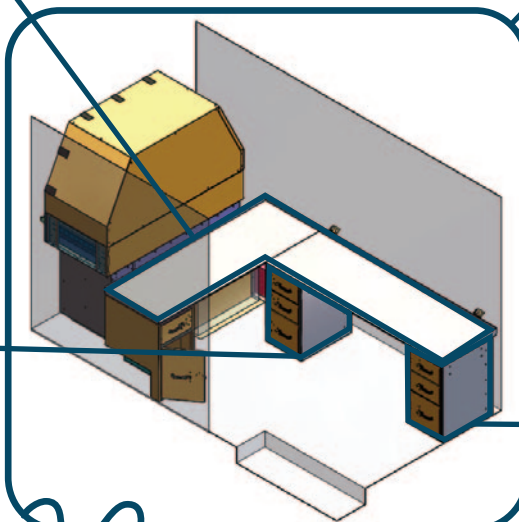

FILING CABINET




BATTERY HOLDER

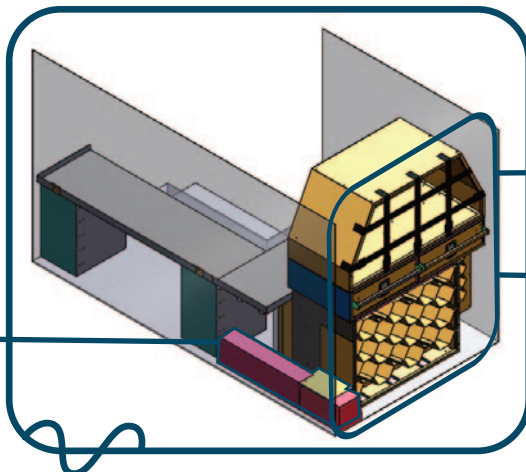

OPEN CARGO AREA WITH TIE-DOWN STRAPS



FIRE EXTINGUISHER HOLDER

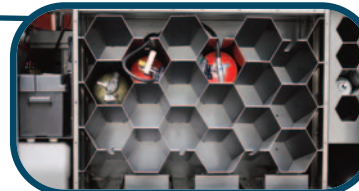


AIR QUALITY MONITORING VEHICLE


**DESK WITH PARTITION AND
POWER MANAGEMENT**



21U SERVER RACKS (x2)

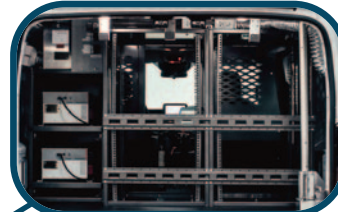

SLIDE-OUT TRANSFORMER RACK

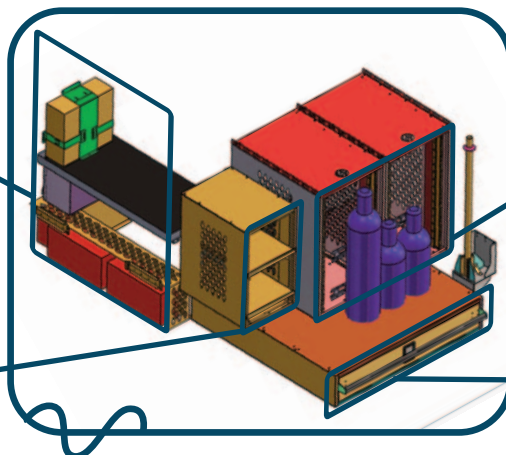

CUSTOM STORAGE DRAWER



FLEET SERVICE VEHICLE

OVERHEAD STORAGE




INTERIOR LIGHTS



WELDER



LOCKERS

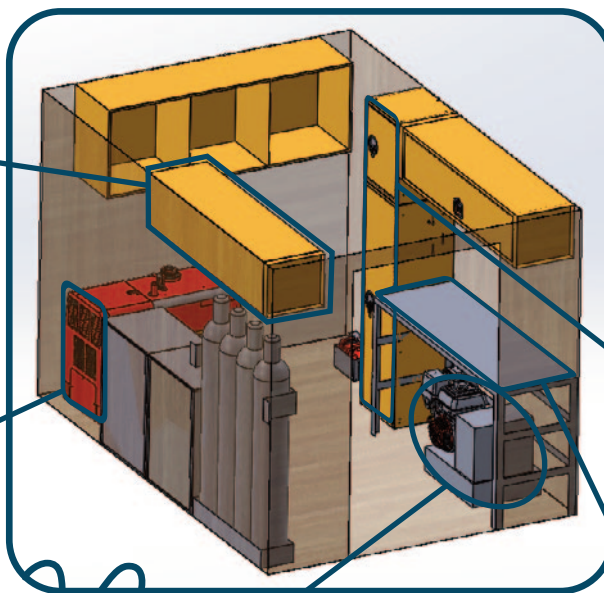

CUSTOM SLIDE-OUT TRAY FOR AIR COMPRESSOR



WORK BENCH WITH STORAGE





**8820 GEORGE BOLTON PKWY.
BOLTON, ONTARIO L7E 2Y4 CANADA
TEL: 905-951-9997
FAX: 905-951-0019
TOLL FREE: 1-800-538-7338
www.dandrelectronics.com**

SOCIAL MEDIA:

TWITTER: https://twitter.com/d_relectronics

INSTAGRAM: <https://www.instagram.com/dnrelectronics/>

FACEBOOK: <https://www.facebook.com/DandRElectronics/>

YOUTUBE: <https://www.youtube.com/channel/UCXbW7-GbgGtPjuTtVTbwIDQ>



Y022023